



### HYCAM POWERSTAT

For Speed Control of HYCAM Models K2001R and K20S1R

Dial reads directly in volts, has sturdy, convenient carrying handle, heavy duty input cord, off-on switch, and grounded household-type outlet, and protected with 10 Amp fuse. Weight of Powerstat: 24 lbs. Available in either 115v AC or 220v AC input.

Model RL236-1MM, 115V AC, 10 Amp, 50/60 cycle in, 0-300V AC 50/60 cycle output.

Model RL236-2MM, 220V AC, 15 Amp, 50/6- cycle in, 0-300V AC 50/60 cycle output.

Manufactured for Red Lake Labs., Inc. by Superior Electric Co.

RED LAKE LABORATORIES, INC.


Santa Clara, California 95051



RLEM-1 EXPOSURE METER


1/21° Reflective, complete with 4 X ND Filter,

Direct reading dials for HYCAM 1/2.5 Shutter, manufactured by Honeywell Photo Products, for Red Lake Labs., Inc.

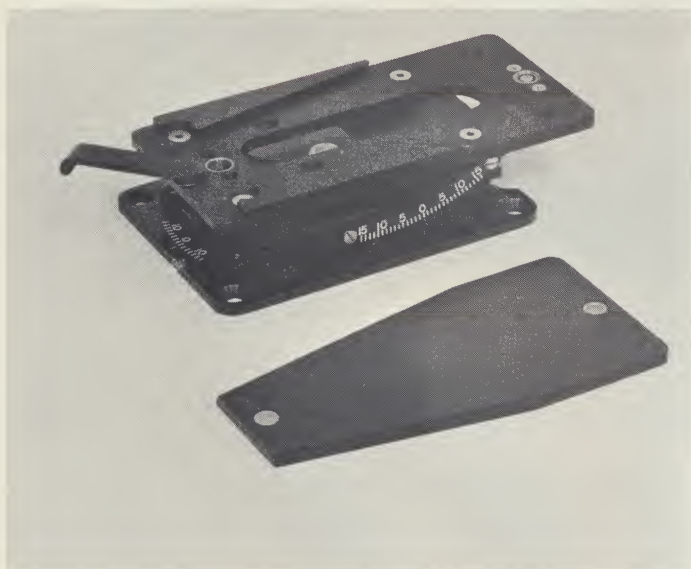

RLWM-1 CAMERA MOUNT

Winter, 1 11/16" x 2 1/4" x 7" with calibrated Azimuth and Elevation Controls, manufactured by Winter Engineering Company, for Red Lake Labs., Inc.

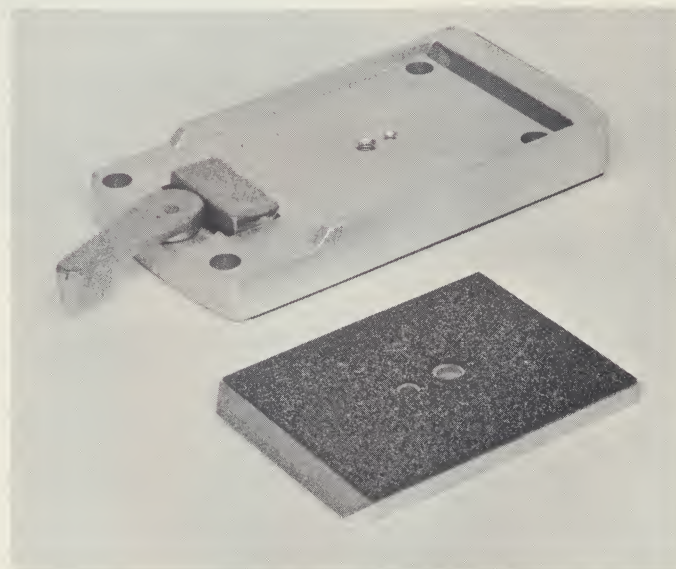

RLQOM-1 CAMERA MOUNT

Quick-on 4 1/2" x 8 1/8" x 1 7/8", manufactured by Quick-Set, Inc. for Red Lake Labs., Inc.

RED LAKE LABORATORIES, INC., 2971 Corvin Dr., Santa Clara, California